



It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler, hereinafter ("HVS")

| Equipment Calibrated: | | Standard Equipment: | |
|-----------------------|---------------------|--------------------------------|---------------------|
| Type: | Dust Monitor System | Type: | High Volume Sampler |
| Model: | OC-9200 | Model: | TE 5170 |
| Equipment No.: | A-06-03 | Equipment No.: | A-01-75 |
| Serial No.: | OC20210316224101 | Serial No.: | 3499 |
| Sensitivity.: | 0.001mg/m3 | Tisch Calibration Orifice No.: | 3864 |

| Date of Calibration: | 21-Feb-24 |
|---------------------------------|-----------|
| Validity of Calibration Record: | 21-Apr-24 |

Calibration

| Calibration Points: | Time | High Volume Sampler | Dust Monitor System |
|---------------------|----------|----------------------------|--|
| Canoration 1 onts. | Minutes | Mass concetration [µg/m^3] | Mass concetration [μg/m ³] |
| | Williacs | y Axis | x Axis |
| 0 | 60 | 0 | 0 |
| 1 | 60 | 235.0 | 72.0 |
| 2 | 60 | 125.0 | 40.0 |
| 3 | 60 | 90.0 | 26.0 |
| Average | 60 | 112.5 | 34.5 |


With the aid of the mathematical model of Simple Linear Regression, the following values are calculated as:

| If the convolction coefficient is aroun (is longer than 0.00), then n | 3.23638385 | Slope: |
|---|------------|--------------------------|
| If the correlation coefficient is green (ie larger than 0.90), then n recalibration is required | 0.84475732 | Intercept: |
| - recumbration is required | | Correlation Coefficient: |

| Scale factor (K): | <u>3.2</u> | (to one decimal point) |
|-------------------|------------|------------------------|
|-------------------|------------|------------------------|

Equation of line:

y(HVS)=3.6x(OC-9200)

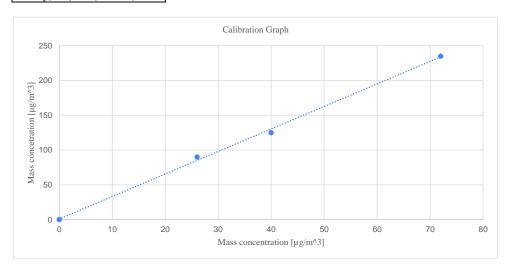

In-house method in according to the instruction manual:
The OC-9200 was compared with a calibrated HVS; the result has been used to calculate the scale factor and correlation coefficient between the two equipment.
The filter papers are weighted by HOKLAS laboratory (HPCT Litimed)

| Recorded by: | Signature: | Date: |
|-------------------------------------|------------|-----------|
| Technical Officer (Wong Shing Kwai) | M. | 23-Feb-24 |
| Checked by: | Signature: | Date: |
| Project Manager (Henry Leung) | Henry day | 23-Feb-24 |

High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET



File No. MA20024/74/0002

| Location. | M-A3 - S.K.H 7 | Tsoi Kung Po Sec | condary School | | | | |
|--------------------------|----------------------------|-------------------|-----------------------------------|-----------------------------|----------------------------------|-------------------------------|-------------------------------------|
| Date: | 8-Feb-24 | | Next Due Date: | 9-7 | Apr-24 | Operator: | SK |
| Equipment No.: | A-0 | 1-74 | | TE-5170 | | | 2204 |
| | | | Ambient C | ondition | | | |
| Temperatur | re Ta (K) | 286.5 | Pressure, Pa | | | 769.7 | |
| Temperatu | 10, 14 (11) | 200.5 | Tressure, Tu | (IIIIII1g) | <u> </u> | 707.7 | |
| | | Or | ifice Transfer Star | ndard Informa | ation | | |
| Serial | No. | 3864 | Slope, mc | 0.05976 | Intercept | t, bc | -0.05018 |
| Last Calibra | ation Date: | 15-Jan-24 | | nc x Qstd + bo | $c = [\Delta H \times (Pa/760)]$ | | |
| Next Calibra | | 15-Jan-25 |] (| $Qstd = \{ [\Delta H x] \}$ | (Pa/760) x (298/7 | Γa)] ^{1/2} -bc} / mo | : |
| | | | | | | | |
| | | | Calibration of T | ΓSP Sampler | | | |
| Calibration | | Or | fice | _ | | HVS | |
| Point | ΔH (orifice), in. of water | [ΔH x (Pa/76 | 50) x (298/Ta)] ^{1/2} | Qstd (CFM) X - axis | ΔW (HVS), in. of water | | 0) x (298/Ta)] ^{1/2} -axis |
| 1 | 15.4 | | 4.03 | 68.24 | 10.7 | 3 | 3.36 |
| 2 | 12.6 | | 3.64 | 61.80 | 8.6 | 3 | 3.01 |
| 3 | 9.2 | | 3.11 | 52.93 | 6.7 | 2 | 2.66 |
| 4 | 5.9 | | 2.49 | 42.56 | 4.5 | 2 | 2.18 |
| 5 | 3.3 | | 1.86 | 32.04 | 3.1 | 1 | 1.81 |
| Slope , mw = Correlation | coefficient* = | <u> </u> | .9981 calibrate. | Intercept, bw | 0.400 | 7 | |
| Enome the TCD E | ald Calibration (| Curve, take Qstd | Set Point Ca | aculation | | | |
| | | ne "Y" value acco | | (Pa/760) x (29 | 98/Ta)] ^{1/2} | | |
| Therefore, Se | et Point; W = (m | nw x Qstd + bw) | ² x (760 / Pa) x (7 | Γa / 298) = | 4.75 | | |
| Remarks: | | | | | | | |
| Conducted by: | Wong Sh | ning Kwai | Signature: | K | <u></u> | Date: | 8-Feb-24 |
| Checked by: | Henry | Leung | Signature: | \-lem | y Olony | Date: | 8-Feb-24 |



RECALIBRATION DUE DATE:

January 15, 2025

Certificate of Calibration

Calibration Certification Information

Cal. Date: January 15, 2024

Rootsmeter S/N: 438320

Ta: 294

°K

Operator: Jim Tisch

Pa: 755.4

mm Hg

Calibration Model #: TE-5025A

Calibrator S/N: 3864

| Run | Vol. Init (m3) | Vol. Final (m3) | ΔVol. (m3) | ΔTime (min) | ΔP (mm Hg) | ΔH (in H2O) |
|-----|-------------------|--------------------|---------------|----------------|---------------|----------------|
| 1 | 1 | 2 | 1 | 1.4380 | 3.3 | 2.00 |
| 2 | 3 | 4 | 1 | 1.0270 | 6.4 | 4.00 |
| 3 | 5 | 6 | 1 | 0.9180 | 8.0 | 5.00 |
| 4 | 7 | 8 | 1 | 0.8750 | 8.9 | 5.50 |
| 5 | 9 | 10 | 1 | 0.7230 | 12.9 | 8.00 |

| | Data Tabulation | | | | | |
|-------------|-----------------|---|--------|----------|---------------------------|--|
| Vstd | Qstd | $\sqrt{\Delta H \left(\frac{Pa}{Pstd}\right) \left(\frac{Tstd}{Ta}\right)}$ | | Qa | $\sqrt{\Delta H (Ta/Pa)}$ | |
| (m3) | (x-axis) | (y-axis) | Va | (x-axis) | (y-axis) | |
| 1.0031 | 0.6975 | 1.4195 | 0.9956 | 0.6924 | 0.8823 | |
| 0.9989 | 0.9727 | 2.0075 | 0.9915 | 0.9655 | 1.2477 | |
| 0.9968 | 1.0858 | 2.2444 | 0.9894 | 1.0778 | 1.3950 | |
| 0.9956 | 1.1378 | 2.3539 | 0.9882 | 1.1294 | 1.4631 | |
| 0.9903 | 1.3697 | 2.8390 | 0.9829 | 1.3595 | 1.7645 | |
| | m= | 2.11196 | | m= | 1.32248 | |
| QSTD | b= | -0.05043 | QA | b= | -0.03134 | |
| | r= | 0.99998 | 4 . | r= | 0.99998 | |

| Calculations | | | | |
|---|--|----------|---|--|
| Vstd= | ΔVol((Pa-ΔP)/Pstd)(Tstd/Ta) | Va= | ΔVol((Pa-ΔP)/Pa) | |
| Qstd= Vstd/ΔTime Qa= Va/ΔTime | | Va/ΔTime | | |
| For subsequent flow rate calculations: | | | | |
| Qstd= | $1/m\left(\left(\sqrt{\Delta H\left(\frac{Pa}{Pstd}\right)\left(\frac{Tstd}{Ta}\right)}\right)-b\right)$ | Qa= | $1/m\left(\left(\sqrt{\Delta H(Ta/Pa)}\right)-b\right)$ | |

| Standard Conditions | | | | |
|---|-----------|--|--|--|
| Tstd: | 298.15 °K | | | |
| Pstd: | 760 mm Hg | | | |
| | Key | | | |
| ΔH: calibrator manometer reading (in H2O) | | | | |
| ΔP: rootsmeter manometer reading (mm Hg) | | | | |
| Ta: actual absolute temperature (°K) | | | | |
| Pa: actual barometric pressure (mm Hg) | | | | |
| b: intercept | | | | |
| m: slope | | | | |

RECALIBRATION

US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

Tisch Environmental, Inc. 145 South Miami Avenue Village of Cleves, OH 45002

www.tisch-env.com

TOLL FREE: (877)263-7610 FAX: (513)467-9009



Certificate of Calibration - Wind Monitoring Station

Description: M-A3 - S.K.H Tsoi Kung Po Secondary School

 Model No.:
 C-OC-9200-wind

 Serial No.:
 OC20210316224101

Equipment No.: A-06-03

Date of Calibration 22-Dec-2023

Next Due Date 21-Jun-2024

1. Performance check of Wind Speed

| Wind Sp | peed, m/s | Difference D (m/s) |
|-------------------------|-----------------------|--------------------|
| Wind Speed Reading (V1) | Anemometer Value (V2) | D = V1 - V2 |
| 0.0 | 0.0 | 0.0 |
| 1.8 | 1.8 | 0.0 |
| 2.5 | 2.6 | -0.1 |
| 4.0 | 3.9 | 0.1 |

2. Performance check of Wind Direction

| Wind Direction (°) | | Difference D (°) |
|-----------------------------|---------------------------|------------------|
| Wind Direction Reading (W1) | Marine Compass Value (W1) | D = W1 - W2 |
| 0 | 0 | 0.0 |
| 90 | 90 | 0.0 |
| 180 | 180 | 0.0 |
| 270 | 270 | 0.0 |

Test Specification:

- 1. Performance Wind Speed Test The wind meter was on-site calibrated against the anemometer
- 2. Performance Wind Direction Test The wind meter was on-site calibrated against the marine compass at four direction

| Calibrated by: | M\ | Approved by: | leng dog | |
|----------------|-----------------|--------------|-------------|--|
| | Wong Shing Kwai | | Henry Leung | |

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00370 Issue Date : 02 May 2023

Application No. : HP00242

Certificate of Calibration

Applicant : Cinotech Consultants Limited

RM 1710, Technology Park,

18 On Lai Street,

Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : SN-01-01

Manufacturer: : SVANTEK

Other information : | Model No. | SVAN 979

Serial No. 27189
Microphone No. 25202

Date Received : 02 May 2023

Test Period : 02 May 2023 to 02 May 2023

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the

documented procedures and using standard and instrument which are

recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius

Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark: 1. Information of the sample description provided by the Applicant.

2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00370 Issue Date : 02 May 2023

Application No. : HP00242

Certificate of Calibration

Measuring equipment

| Description | Sound Calibrator |
|---------------|------------------|
| Manufacturer | Brüel & Kjær |
| Model No. | TYPE 4231 |
| Serial No. | 2326353 |
| | |
| Equipment No. | N-02-01 |

Test Result

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0 | 93.9 | - 0.1 | ± 1.5 |
| 114.0 | 114.0 | ± 0.0 | ± 1.5 |

Note

- : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
 - 2. The indication value was obtained from the average of ten replicated measurement.

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00430 Issue Date : 08 Sep 2023

Application No. : HP00304

Certificate of Calibration

Applicant : Cinotech Consultants Limited

RM 1710, Technology Park,

18 On Lai Street,

Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-12-02

Manufacturer: : BSWA Technology

Other information : Model No

| Model No. | BSWA 308 |
|----------------|----------|
| Serial No. | 570187 |
| Microphone No. | 590079 |

Date Received : 06 Sep 2023

Test Period : 07 Sep 2023 to 07 Sep 2023

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the

documented procedures and using standard and instrument which are

recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius

Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark: 1. Information of the sample description provided by the Applicant.

2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Application No. : HP00304

Certificate of Calibration

Measuring equipment

| Description | Sound Calibrator |
|---------------|------------------|
| Manufacturer | Brüel & Kjær |
| Model No. | TYPE 4231 |
| Serial No. | 2326353 |
| Equipment No. | N-02-01 |

Test Result :

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0 | 94.2 | + 0.2 | ± 1.5 |
| 114.0 | 114.2 | + 0.2 | ± 1.5 |

Note

- : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
 - 2. The indication value was obtained from the average of ten replicated measurement.

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Application No. : HP00305

Certificate of Calibration

Applicant : Cinotech Consultants Limited

RM 1710, Technology Park,

18 On Lai Street,

Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : N-12-06

Manufacturer: : BSWA Technology

Other information :

| Model No. | BSWA 308 |
|----------------|----------|
| Serial No. | 580156 |
| Microphone No. | 580804 |

Date Received : 06 Sep 2023

Test Period : 07 Sep 2023 to 07 Sep 2023

Test Requested : Performance checking for Sound Level Meter

Test Method : The Sound Level Calibrator has been calibrated in accordance with the

documented procedures and using standard and instrument which are

recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius

Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark: 1. Information of the sample description provided by the Applicant.

2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Application No. : HP00305

Certificate of Calibration

Measuring equipment

| Description | Sound Calibrator |
|---------------|------------------|
| Manufacturer | Brüel & Kjær |
| Model No. | TYPE 4231 |
| Serial No. | 2326353 |
| Equipment No. | N-02-01 |

Test Result

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0 | 94.1 | + 0.1 | ± 1.5 |
| 114.0 | 114.1 | + 0.1 | ± 1.5 |

Note

- : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
 - 2. The indication value was obtained from the average of ten replicated measurement.

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00380 Issue Date : 10 May 2023

Application No. : HP00252

Certificate of Calibration

Applicant : Cinotech Consultants Limited

RM 1710, Technology Park,

18 On Lai Street,

Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Sound Level Calibrator.

Equipment No.: : N-13-03

Manufacturer: : SOUNDTEK

Other information : Model No. ST-120

| Serial No. | 181001637

Date Received : 09 May 2023

Test Period : 09 May 2023 to 09 May 2023

Test Requested : Performance checking for Sound Level Calibrator

Test Method : The Sound Level Meter and Calibrator has been calibrated in accordance with

the documented procedures and using standard and instrument which are

recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius

Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.

2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00380 Issue Date : 10 May 2023

Application No. : HP00252

Certificate of Calibration

Measuring equipment

| Description | Sound Calibrator |
|---------------|------------------|
| Manufacturer | Brüel & Kjær |
| Model No. | TYPE 4231 |
| Serial No. | 2326353 |
| Equipment No. | N-02-01 |

| Description | Sound Meter |
|----------------|-----------------|
| Manufacturer | BSWA Technology |
| Model No. | BSWA 308 |
| Serial No. | 570183 |
| Microphone No. | 570605 |
| Equipment No. | N-12-01 |

Test Result

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0 | 94.1 | + 0.1 | ± 0.3 |
| 114.0 | 114.2 | + 0.2 | ± 0.5 |

Note

- : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
 - 2. The indication value was obtained from the average of ten replicated measurement.

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00389 | Issue Date : 20 Jul 2023

Application No. : HP00262

Certificate of Calibration

Applicant : Cinotech Consultants Limited

RM 1710, Technology Park,

18 On Lai Street,

Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Sound Level Calibrator.

Equipment No.: : N-16-01

Manufacturer: : Hangzhou Aihua Instruments Co., Ltd.

Other information : Model No.

Model No. AWA6021A
Serial No. 1023253

Date Received : 18 Jul 2023

Test Period : 19 Jul 2023 to 19 Jul 2023

Test Requested : Performance checking for Sound Level Calibrator

Test Method : The Sound Level Meter and Calibrator has been calibrated in accordance with

the documented procedures and using standard and instrument which are

recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius

Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.

2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00389 Issue Date : 20 Jul 2023

Application No. : HP00262

Certificate of Calibration

Measuring equipment

| Description | Sound Calibrator |
|---------------|------------------|
| Manufacturer | Brüel & Kjær |
| Model No. | TYPE 4231 |
| Serial No. | 2326353 |
| Equipment No. | N-02-01 |

| Description | Sound Meter |
|----------------|-----------------|
| Manufacturer | BSWA Technology |
| Model No. | BSWA 308 |
| Serial No. | 570183 |
| Microphone No. | 570605 |
| Equipment No. | N-12-01 |

Test Result

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0 | 94.2 | + 0.2 | ± 0.3 |
| 114.0 | 114.2 | + 0.2 | ± 0.5 |

Note

- : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
 - 2. The indication value was obtained from the average of ten replicated measurement.

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00406 | Issue Date : 10 Aug 2023

Application No. : HP00284

Certificate of Calibration

Applicant : Cinotech Consultants Limited

RM 1710, Technology Park,

18 On Lai Street,

Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Sound Level Calibrator.

Equipment No.: : N-16-02

Manufacturer: : Hangzhou Aihua Instruments Co., Ltd.

Other information : Model No.

Model No. AWA6021A
Serial No. 1023064

Date Received : 07 Aug 2023

Test Period : 09 Aug 2023 to 09 Aug 2023

Test Requested : Performance checking for Sound Level Calibrator

Test Method : The Sound Level Meter and Calibrator has been calibrated in accordance with

the documented procedures and using standard and instrument which are

recommended by the manufacturer, or equivalent.

Test conditions : Room Temperature: 22-25 degree Celsius

Relative Humidity: 35-70%

Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.

2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Rm 1904, Technology Park 18 On Lai Street, Shatin

NT, Hong Kong

Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Report No. : 00406 | Issue Date : 10 Aug 2023

Application No. : HP00284

Certificate of Calibration

Measuring equipment

| Description | Sound Calibrator |
|---------------|------------------|
| Manufacturer | Brüel & Kjær |
| Model No. | TYPE 4231 |
| Serial No. | 2326353 |
| Equipment No. | N-02-01 |

| Description | Sound Meter |
|----------------|-----------------|
| Manufacturer | BSWA Technology |
| Model No. | BSWA 308 |
| Serial No. | 570183 |
| Microphone No. | 570605 |
| Equipment No. | N-12-01 |

Test Result

| Reference value, dB | Indication value, dB | Deviation, dB | Allowed deviation, dB |
|---------------------|----------------------|---------------|-----------------------|
| 94.0 | 94.3 | + 0.3 | ± 0.3 |
| 114.0 | 114.4 | + 0.4 | ± 0.5 |

Note

- : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
 - 2. The indication value was obtained from the average of ten replicated measurement.