

#### CERTIFICATE OF CALIBRATION

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler, hereinafter ("HVS")

Equipment Calibrated:		Standard Equipment:	
Type:	Dust Monitor System	Type:	High Volume Sampler
Model:	OC-9200	Model:	TE 5170
Equipment No.:	A-06-03	Equipment No.:	A-01-75
Serial No.:	OC20210316224101	Serial No.:	3499
Sensitivity.:	0.001mg/m3	Tisch Calibration Orifice No.:	3864

Date of Calibration:	21-Oct-24
Validity of Calibration Record:	21-Dec-24

#### Calibration


Calibration Points:	Time	High Volume Sampler	Dust Monitor System
Canoration Fonts.	Minutes	Mass concetration [µg/m^3]	Mass concetration [µg/m^3]
	i initiaes	y Axis	x Axis
0	60	0	0
1	60	225.0	75.0
2	60	125.0	44.0
3	60	81.0	29.0
Average	60	107.8	37.0

With the aid of the mathematical model of Simple Linear Regression, the following values are calculated as:

Slope:	2.99965824	If the convolution coefficient is green (is longer than 0.00), then us
Intercept:	2 22725475	If the correlation coefficient is green (ie larger than 0.90), then no recalibration is required
Correlation Coefficient:		reculoration is required

	<u>Scale factor (K):</u>	<u>3.0</u>	(to one decimal point)
--	--------------------------	------------	------------------------

#### Equation of line:

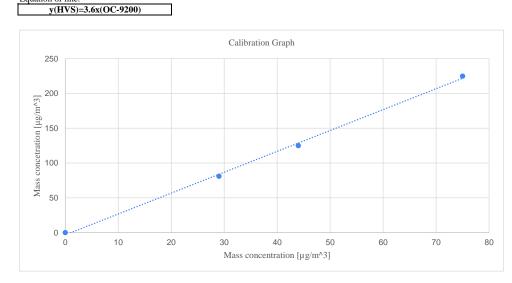

In-house method in according to the instruction manual: The OC-9200 was compared with a calibrated HVS; the result has been used to calculate the scale factor and correlation coefficient between the two equipment. **The filter papers are weighted by HOKLAS laboratory (HPCT Litimed)** 

Recorded by:	Signature:	Date:
Technical Officer (Wong Shing Kwai)	Kl.	21-Oct-24
Checked by:	Signature:	Date:
Project Manager (Henry Leung)	fleny drag	21-Oct-24

## **High-Volume TSP Sampler** 5-POINT CALIBRATION DATA SHEET



File No. MA20024/74/0006

Location.	M-A3 - S.K.H Tsoi Kung Po Secondary School							
Date:	8-0	ct-24	Next Due Date:	8-Dec-24	Operator:	SK		
Equipment No.:	A-01-74		Model No.: TE-5170		Serial No.	2204		
			Ambient Condit	ion				
			Amblent Colluit					
Temperature, Ta (K)301.2Pressure, Pa (mmHg)760.7								
	-		-					

Orifice Transfer Standard Information								
Serial No.	3864	Slope, mc 0.05976 Intercept, bc -0.05018						
Last Calibration Date:	15-Jan-24	mc x Qstd + bc = $[\Delta H x (Pa/760) x (298/Ta)]^{1/2}$						
Next Calibration Date:	15-Jan-25	Qstd = { $[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$ -bc} / mc						

Calibration of TSP Sampler							
Calibration		Orfice			HVS		
Point	$\Delta H$ (orifice), in. of water	$[\Delta H x (Pa/760) x (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	$\Delta W$ (HVS), in. of water	$[\Delta W \ x \ (Pa/760) \ x \ (298/Ta)]^{1/2}$ Y-axis		
1	15.5	3.92	66.40	9.9	3.13		
2	12.4	3.50	59.48	8.1	2.83		
3	9.1	3.00	51.07	6.3	2.50		
4	5.8	2.40	40.94	3.8	1.94		
5	3.2	1.78	30.63	2.2	1.48		
By Linear Regression of Y on X Slope , mw = 0.0468 Intercept, bw = 0.0495 Correlation coefficient* = 0.9987 *If Correlation Coefficient < 0.990, check and recalibrate.							
Set Point Calculation From the TSP Field Calibration Curve, take Qstd = 43 CFM							
From the Regression Equation, the "Y" value according to $\mathbf{mw} \mathbf{x} \mathbf{Qstd} + \mathbf{bw} = [\Delta \mathbf{W} \mathbf{x} (\mathbf{Pa/760}) \mathbf{x} (\mathbf{298/Ta})]^{1/2}$ Therefore, Set Point; W = ( mw x Qstd + bw ) <sup>2</sup> x ( 760 / Pa ) x ( Ta / 298 ) =							
Remarks:							
Conducted by:	Wong Shi	ng Kwai Signature:	k	火-	Date: 8-Oct-24		
Checked by:	Conducted by:     Wong Shing Kwai     Signature:     Model     Date:     8-Oct-24       Checked by:     Henry Leung     Signature:     Leng Model     Date:     8-Oct-24						

15 viro	n m	ent	al	J			Di Janua	ALIBRATION UE DATE: ary 15, 2025
	Ge	rtifa	cate				ntion	
			Calibration	Certificatio	on Informat	ion		
Cal. Date: Ja	nuary 15,	2024	Rootsr	neter S/N:	438320	Ta:	294	°К
Operator: Ji	m Tisch					Pa:	755.4	mm Hg
Calibration Mo	ndel #•	TE-5025A	Calib	orator S/N:	3864			0
	Juci III	12 30234	Cuin		0004			
		Vol. Init	Vol. Final	ΔVol.	ΔTime	ΔΡ	ΔH	
	Run	(m3)	(m3)	(m3)	(min)	(mm Hg)	(in H2O)	
	1	1	2	1	1.4380	3.3	2.00	
	2	3	4	1	1.0270	6.4	4.00	
	3	5	6	1	0.9180	8.0	5.00	
	4	7	8	1	0.8750	8.9	5.50	
	5	9	10	1	0.7230	12.9	8.00	
			D	Data Tabula	tion			
	AH(_Pa_)(_Tst					0-	$\sqrt{\Delta H(Ta/Pa)}$	
	Vstd	Qstd	1				/	
	(m3) 1.0031	(x-axis) 0.6975	(x-axis) (y-axis) 0.6975 1.4195		Va 0.9956	(x-axis) 0.6924	(y-axis) 0.8823	
-	0.9989	0.9727	2.007		0.9915	0.9655	1.2477	
- F	0.9968	1.0858	2.244		0.9894	1.0778	1.3950	
F	0.9956	1.1378	2.353		0.9882	1.1294	1.4631	
	0.9903	1.3697	2.839	90	0.9829	1.3595	1.7645	
		m=	2.111	.96		m=	1.32248	
	<b>QSTD</b>	b=	-0.050		QA	b=	-0.03134	
		r=	0.999	98		r=	0.99998	
				Calculatio	าร			
	Vstd=	ΔVol((Pa-ΔP)	/Pstd)(Tstd/Ta			ΔVol((Pa-ΔF	P)/Pa)	
		Vstd/∆Time				Va/∆Time		
	For subsequent				te calculation	ns:		
	<b>Qstd=</b> $1/m\left(\left(\sqrt{\Delta H\left(\frac{Pa}{Pstd}\right)\left(\frac{Tstd}{Ta}\right)}\right)$ -				Qa=	1/m (( √ΔH	(Ta/Pa))-b)	
		Conditions						
Tstd:	298.15			[		RECA	IBRATION	
Pstd:		mm Hg				mmondo		n non 1000
		ey er reading (i	n H2O)				nual recalibratio	· /
ΔH: calibrator ΔP: rootsmeter							egulations Part 5 Reference Meth	
Ta: actual abso							ended Particulate	1
Pa: actual baro							re, 9.2.17, page 3	
and the second se					UIR LIR	- Autospile	, c, J.z.r, page :	
b: intercept m: slope				L				

Tisch Environmental, Inc. 145 South Miami Avenue Village of Cleves, OH 45002

<u>www.tisch-env.com</u> TOLL FREE: (877)263-7610 FAX: (513)467-9009

# CIN@TECH 🤳

## **Certificate of Calibration - Wind Monitoring Station**

Description:	M-A3 - S.K.H Tsoi Kung Po Secondary School
Model No.:	<u>C-OC-9200-wind</u>
Serial No.:	<u>OC20210316224101</u>
Equipment No.:	<u>A-06-03</u>
Date of Calibration	<u>20-Jun-2024</u>
Next Due Date	<u>21-Dec-2024</u>

#### 1. Performance check of Wind Speed

Wind Sp	beed, m/s	Difference D (m/s)
Wind Speed Reading (V1)	Anemometer Value (V2)	D = V1 - V2
0.0	0.0	0.0
1.8	1.8	0.0
2.5	2.6	-0.1
3.5	3.6	-0.1

#### 2. Performance check of Wind Direction

Wind Di	rection (°)	Difference D (°)
Wind Direction Reading (W1)	Marine Compass Value (W1)	D = W1 - W2
0	0	0.0
90	90	0.0
180	180	0.0
270	270	0.0

**Test Specification:** 

1. Performance Wind Speed Test - The wind meter was on-site calibrated against the anemometer

2. Performance Wind Direction Test - The wind meter was on-site calibrated against the marine compass at four direction

Calibrated by: \_\_\_\_\_\_\_ Approved by: \_\_\_\_\_\_\_\_ Henry Leung

Rm 1904, Technology Park 18 On Lai Street, Shatin NT, Hong Kong Tel: +852 3841 4388 Website: https://www.hpct.com.hk



Issue Date : 03 May 2024

Report No. : 00676 : HP00537 Application No.

**Certificate of Calibration** 

Applicant

: Cinotech Consultants Limited RM 1710, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong

Sample Description : Submitted equipment stated to be Integrating Sound Level Meter.

Equipment No.: : SN-01-01

Manufacturer: : SVANTEK

Other information	:	Model No.	SVAN 979
		Serial No.	27189
		Microphone No.	25202

Date Received	:	02 May 2024
Test Period	:	02 May 2024 to 02 May 2024
Test Requested	:	Performance checking for Sound Level Meter
Test Method	:	The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.
Test conditions	:	Room Temperature: 22-25 degree Celsius Relative Humidity: 35-70%
Test Result	:	Refer to the test result(s) on page 2.

: 1. Information of the sample description provided by the Applicant. Remark

2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Lee Wai Kit Laboratory Manager

Rm 1904, Technology Park 18 On Lai Street, Shatin NT, Hong Kong Tel: +852 3841 4388 Website: https://www.hpct.com.hk

:

:



Issue Date : 03 May 2024

Report No.:00676Application No.:HP00537

# **Certificate of Calibration**

Measuring

equipment

Description	Sound Calibrator
Manufacturer	Brüel & Kjær
Model No.	TYPE 4231
Serial No.	2326353
Equipment No.	N-02-01

#### Test Result

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.0	± 0.0	± 1.5
114.0	114.1	+ 0.1	± 1.5

Note : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

2. The indication value was obtained from the average of ten replicated measurement.

Report No.

Rm 1904, Technology Park 18 On Lai Street, Shatin NT, Hong Kong Tel: +852 3841 4388 Website: https://www.hpct.com.hk

: 00568



Issue Date : 14 Feb 2024

: HP00436 Application No. **Certificate of Calibration** Applicant : Cinotech Consultants Limited RM 1710, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong Sample Description : Submitted equipment stated to be Integrating Sound Level Meter. Equipment No.: : N-12-03 Manufacturer: : BSWA Technology Other information : Model No. **BSWA 308** Serial No. 570188 Microphone No. 570608

Date Received	:	05 Feb 2024
Test Period	:	07 Feb 2024 to 07 Feb 2024
Test Requested	:	Performance checking for Sound Level Meter
Test Method	:	The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.
Test conditions	:	Room Temperature: 22-25 degree Celsius Relative Humidity: 35-70%
Test Result	:	Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.2. The result(s) relate only to the items tested or calibrated.

The result(s) relate only to the items tested of camprated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Lee Wai Kit Laboratory Manager

Rm 1904, Technology Park 18 On Lai Street, Shatin NT, Hong Kong Tel: +852 3841 4388 Website: https://www.hpct.com.hk

:

:



Issue Date : 14 Feb 2024

Report No.:00568Application No.:HP00436

# **Certificate of Calibration**

Measuring

equipment

Description	Sound Calibrator
Manufacturer	Brüel & Kjær
Model No.	TYPE 4231
Serial No.	2326353
Equipment No.	N-02-01

#### Test Result

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.0	± 0.0	± 1.5
114.0	113.9	- 0.1	± 1.5

Note : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

2. The indication value was obtained from the average of ten replicated measurement.

Report No.

Rm 1904, Technology Park 18 On Lai Street, Shatin NT, Hong Kong Tel: +852 3841 4388 Website: https://www.hpct.com.hk

: 00618



Issue Date : 18 Mar 2024

 Application No.
 HP00473

 Applicant
 Cinotech Consultants Limited RM 1710, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong

 Sample Description
 Submitted equipment stated to be Integrating Sound Level Meter.

 Equipment No.:
 N-12-06

 Manufacturer:
 BSWA Technology

 Other information
 Model No.
 BSWA 308

:	Model No.	BSWA 308
	Serial No.	580156
	Microphone No.	580804

Date Received	:	06 Mar 2024
Test Period	:	14 Mar 2024 to 14 Mar 2024
Test Requested	:	Performance checking for Sound Level Meter
Test Method	:	The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent.
Test conditions	:	Room Temperature: 22-25 degree Celsius Relative Humidity: 35-70%
Test Result	:	Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.

2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

Lee Wai Kit Laboratory Manager

Rm 1904, Technology Park 18 On Lai Street, Shatin NT, Hong Kong Tel: +852 3841 4388 Website: https://www.hpct.com.hk

:

:



Issue Date : 18 Mar 2024

Report No.:00618Application No.:HP00473

# **Certificate of Calibration**

Measuring

equipment

Description	Sound Calibrator	
Manufacturer	Brüel & Kjær	
Model No.	TYPE 4231	
Serial No.	2326353	
Equipment No.	N-02-01	

#### Test Result

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.0	± 0.0	± 1.5
114.0	114.1	+ 0.1	± 1.5

Note : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

2. The indication value was obtained from the average of ten replicated measurement.

Rm 1904, Technology Park 18 On Lai Street, Shatin NT, Hong Kong Tel: +852 3841 4388 Website: https://www.hpct.com.hk



: 00736 Issue Date : 28 Jun 2024 Report No. Application No. : HP00592 **Certificate of Calibration** Applicant : Cinotech Consultants Limited RM 1710, Technology Park, 18 On Lai Street, Shatin, N.T., Hong Kong Sample Description : Submitted equipment stated to be Sound Level Calibrator. Equipment No.: : N-16-01 Manufacturer: : Hangzhou Aihua Instruments Co., Ltd. Other information : Model No. AWA6021A Serial No. 1023253 : 27 Jun 2024 Date Received Test Period : 28 Jun 2024 to 28 Jun 2024 : Performance checking for Sound Level Calibrator **Test Requested** Test Method : The Sound Level Meter and Calibrator has been calibrated in accordance with the documented procedures and using standard and instrument which are recommended by the manufacturer, or equivalent. **Test conditions** : Room Temperature: 22-25 degree Celsius Relative Humidity: 35-70% Test Result : Refer to the test result(s) on page 2.

Remark : 1. Information of the sample description provided by the Applicant.2. The result(s) relate only to the items tested or calibrated.

For and on behalf of HIGH PRECISION CHEMICAL TESTING LIMITED

 $\mathcal{C}$ 

Lee Wai Kit Laboratory Manager

Rm 1904, Technology Park 18 On Lai Street, Shatin NT, Hong Kong Tel: +852 3841 4388 Website: https://www.hpct.com.hk

:

:



Issue Date : 28 Jun 2024

Report No.:00736Application No.:HP00592

# **Certificate of Calibration**

Measuring

~ ~	:		~	
eq	uir	)m	en	τ

Sound Calibrator	
Brüel & Kjær	
TYPE 4231	
2326353	
N-02-01	
Sound Meter	
BSWA Technology	
BSWA 308	
570183	
570605	
N-12-01	

#### Test Result

Reference value, dB	Indication value, dB	Deviation, dB	Allowed deviation, dB
94.0	94.1	+ 0.1	± 0.3
114.0	114.1	+ 0.1	± 0.5

- Note : 1. "Instrument Readings" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.
  - 2. The indication value was obtained from the average of ten replicated measurement.